



Sanicompact

EVOLUTION

NEW

		 Toilet	 Wall-hung toilet	 Wash basin	 Shower cubicle	 Eco+ Dual-flush system
	Sanicompact 43 The most compact in the range	P.32 •		Optional		✓
	Sanicompact Pro Compact and contemporary design	P.33 •		Optional		✓
	Saniflush Entirely ceramic complete toilet with efficient maceration system	P.34 •				
	Sanismart Lightness and hygiene combined in one unit	P.35 •				✓
	Sanicompact Comfort Wall-hung bowl with clean lines and height-adjustable installation frame	P.36				✓
	Sanicompact Comfort+ Frame + wall-hung bowl solution with optional housing	P.37				✓
	Sanicompact Comfort Box Complete solution: self-supporting frame + wall-hung bowl + 3 housing colour options	P.38				✓
	Sanicompact Comfort Style Complete solution: self-supporting frame + wall-hung bowl + 2 housing colour options	P.39				✓

ECO+ DUAL-FLUSH SYSTEM

For over 60 years, sfa has been constantly reinventing itself and innovating.

Since 2009, the company has been involved in environmental protection by extending the ECO+ system to its entire Sanicompact range.
This system provides a dual flush using only 1.8 or 3 liter of water.

With this system, SFA establishes its Sanicompact range as the most water efficient on the market.

This represents water savings of over 13,000 L (13 m3) compared to a conventional toilet fitted with a 3 L/6 L flush (over one year for a family of 4 people).



A Sanicompact saves more than 5,200 L compared to any other equivalent macerators on the market.

HOW TO INSTALL A SANICOMPACT?

To install the Sanicompact you must have: a water inlet + a water outlet + a power socket.



1

Connect your Sanicompact to the cold water supply pipe.



2



3

Connect the Sanicompact drainage elbow to your PVC pipe and connect it to your main drain.




4

Connect the Sanicompact to your 230V socket: and it works!

HOW DOES IT WORK?

Pressing the flush button starts a new program, firstly activating the bowl rinse.

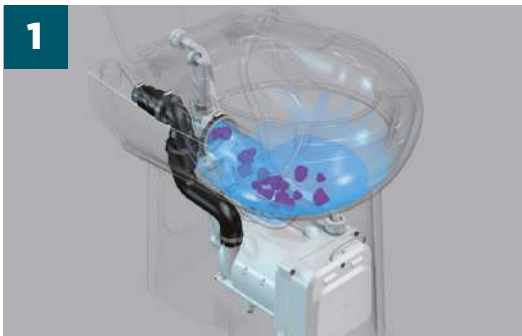

1

The motor starts up: water and matter are sucked out.



2



3

Finely ground matter is expelled. A check valve prevents the return of wastewater.



4

The macerator is ready for use again.

Sanicompact 43



3 m
30 m



BYC Cert. 0045364



PRODUCT BENEFITS

- Ultra-compact toilet and has a depth of just 44 cm
- Can be connected to a washbasin in version C43LV
- Eco+ dual-flush system 1.8/3 L

CONNECTIONS

← Discharge diameter ext. : 32 mm

→ External inlet diameter : 40 mm




Multi-cutter disc



PACK CONTAINS

non-return valve, floor fixings included, Soft-close detachable toilet seat

CURVE

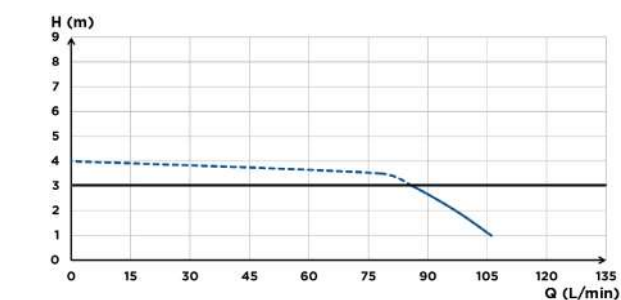

— recommended max height: 3 m

TECHNICAL FEATURES

Number of inlets	-	1 with LV version
External inlet diameter	-	40 mm
Discharge diameter ext.	32 mm	
Max. incoming temperature	35 °C	
Flush volume	1.8/3 L	
Voltage / Frequency	220-240 V / 50-60 Hz	
Motor power	550 W	
IP Rating	IP44	
Electrical class	I	
Noise level	51 dB(A)	
Identification and logistics		
Gross weight	25 kg	
EAN code	3308814399011	3308815013268
Product code	C43STD	C43LV

DIMENSIONS

